

ALTOS® Loose Tube, Gel-Filled Cable

48 F, Single-mode (OS2)

CORNING

Corning ALTOS® all-dielectric cables are lightweight cables designed for duct and aerial (lashed) installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

Features and Benefits

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

SZ-stranded, loose tube design

Isolates fibers from installation and environmental rigors and facilitates mid-span access

Dielectric central strength member

No preferential bend and requires no bonding or grounding



Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

Standards

Approval and Listings USDA Rural Development Programs

Design and Test Criteria Telcordia GR-20, ICEA-640

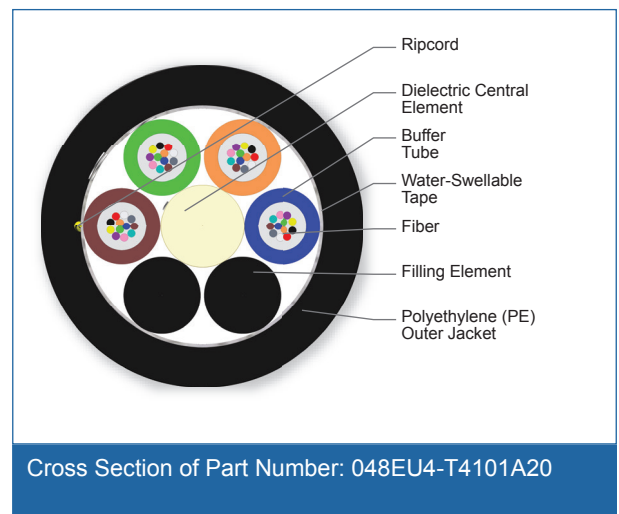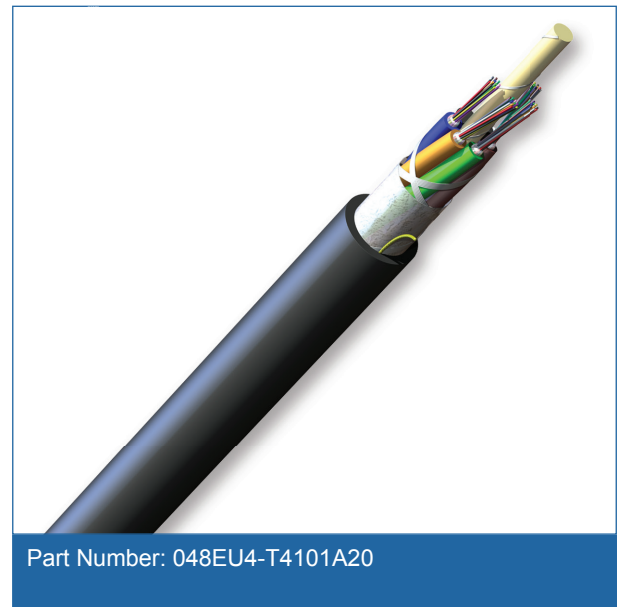

ALTOS[®] Loose Tube, Gel-Filled Cable

48 F, Single-mode (OS2)

CORNING

Specifications

General Specifications

Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	48
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	4
Buffer Tube Color Coding	Blue, Orange, Green, Brown
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	2
Tape	Water-swellable
Number of Ripcords	1
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

Mechanical Characteristics Cable

Max. Tensile Strengths, Short-Term	2700 N (600 lbf)
Max. Tensile Strengths, Long-Term	890 N (200 lbf)
Weight	80 kg/km (54 lb/1000 ft)
Nominal Outer Diameter	10.5 mm (0.41 in)

ALTOS® Loose Tube, Gel-Filled Cable

48 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Min. Bend Radius Installation	158 mm (6.2 in)
Min. Bend Radius Operation	105 mm (4.1 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Type	Single-mode
Fiber Core Diameter	8.2 µm
Fiber Category	OS2
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Serial 1 Gigabit Ethernet	5000 m / - / -
Serial 10 Gigabit Ethernet	10000 m / - / 40000 m

* ITU-T G.652 D compliant.

* Meets 0.75 ns optical skew when used in all Corning Plug and Play™/Pretium EDGE® Systems Solutions.

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Customer Care Representative for additional information.

Ordering Information

Part Number	048EU4-T4101A20
Product Description	ALTOS® Loose Tube, Gel-Filled Cable, 48 F, Single-mode (OS2)

ALTOS[®] Loose Tube, Gel-Filled Cable

48 F, Single-mode (OS2)

The CORNING logo is a blue square with the word "CORNING" in white, uppercase, sans-serif font centered inside.

Notes



Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/cablesystems

A complete listing of the trademarks of Corning Cable Systems is available at www.corning.com/cablesystems/trademarks.

Corning Cable Systems is ISO 9001 certified. © 2014 Corning Cable Systems. All rights reserved.